

Cable Replacement Instructions for Floorstand and Wall Mount Courtesy Charging Stations

Required Hardware:

1-8 replacement charging cables



Required Tools:


Phillips Screwdrivers, #1, #2



Assembly:


1

Unplug the charging station.

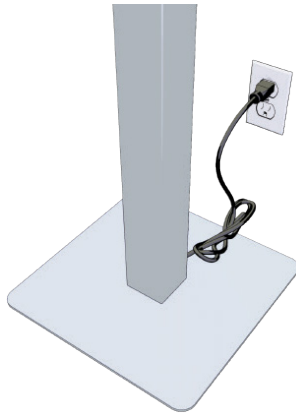

2


Disconnect the power supply from the charging station unit. Remove the security screws which connect the charging station unit to the mounting bracket.

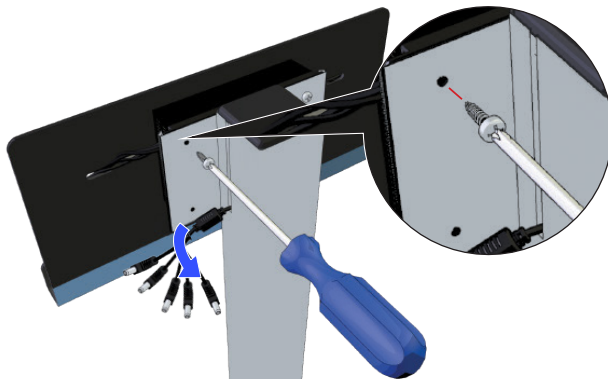

IMPORTANT: Keep screws in a safe place to prevent losing them.

3


Slide the charging station unit upward to separate it from the mounting bracket.

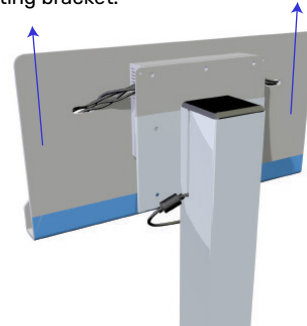

CAUTION: If the housing is warm, do not open the housing. Wait until the housing cools to room temperature before proceeding to Step 4.


4

Remove the five screws which connect the back plate of the tech box. Then remove the back plate.

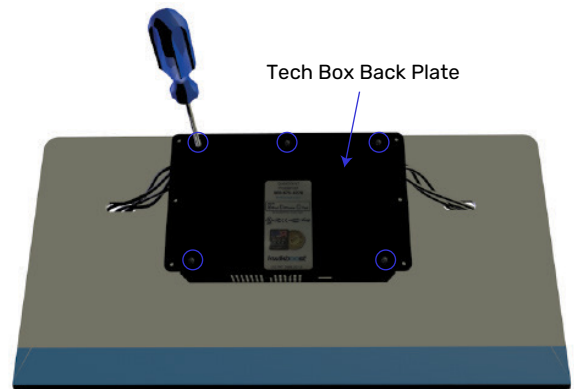

5

Remove the old charging cables by feeding the ends through the slots in the billboard. Then unplug the old cables from the USB ports on the circuit board. Once removed install the new cables by following these instructions in reverse.

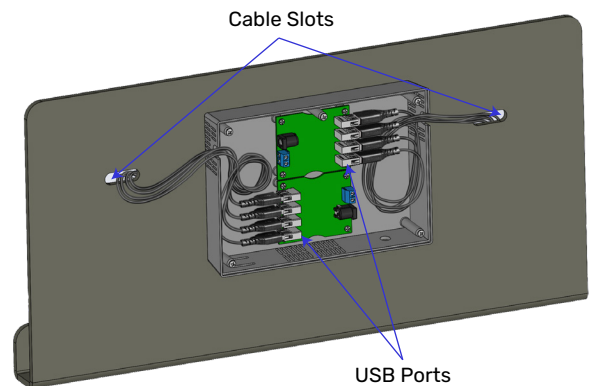

IMPORTANT: Phone/tablet charging only.
Not compatible with laptops.