CHMC006 32-Bay USB Type-C® Open Charging Cart Assembly Instructions

PARTS LIST:



A x 1
Left Cart Frame

B x 1
Right Cart Frame

C x 2
Locking Stem Caster

D x 2
Stem Caster



E x 2
Lower Shelf Panel



F x 2
Rear Shelf Panel

G x 2
Left Panel Gusset

H x 2
Right Panel Gusset



I x 2
Lower Tray Panel



J x 2
USB Type-C® Power Strip



K x 2
Tray Front Panel



L x 34
Device Divider

M x 32
USB Type-C® Charging Cable



N x 2
Security Bracket

HARDWARE

O x 4
Cap Nut
M8

P x 4
Split Washer
M8

Q x 22
Large Frame Screw
1/4" x 15mm

R x 32
Small Frame Screw
M4 x 8mm

S x 66
Cable Clip

ASSEMBLY TOOLS

Included:

T x 1
Small Allen Wrench

Not Included:



Phillips Head Screwdriver

ASSEMBLY INSTRUCTIONS:

1 Attach two Locking Stem Casters (**C**) and two Stem Casters (**D**) as shown to Left Cart Frame (**A**) and Right Cart Frame (**B**) using Cap Nut (**O**) and Split Washer (**P**).

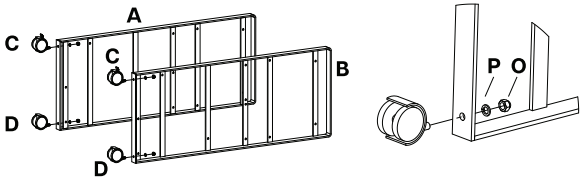

2 Construct a Shelf Assembly by connecting a Lower Shelf Panel (**E**) and a Rear Shelf Panel (**F**) using three Large Frame Screws (**Q**). Repeat this step to make a second Shelf Assembly.

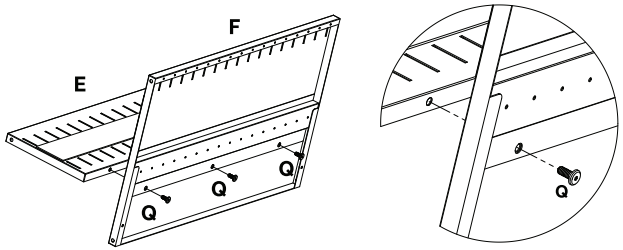

3 Attach the Left Cart Frame (**A**) to each Shelf Assembly using three Large Frame Screws (**Q**) per shelf.

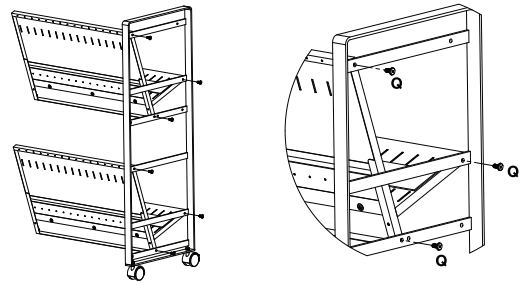

4 Attach the Right Cart Frame (**B**) to each Shelf Assembly using three Large Frame Screws (**Q**) per shelf.

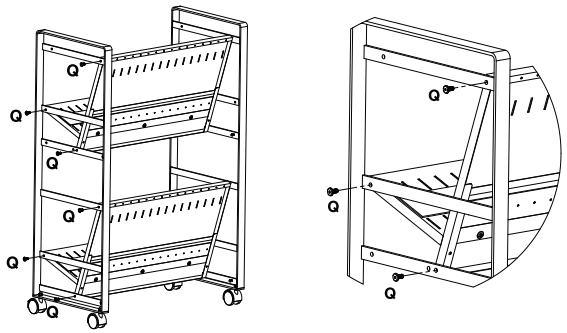

5 Attach the Left Panel Gussets (**G**) and the Right Panel Gussets (**H**) as shown using one Small Frame Screw (**R**) per gusset.

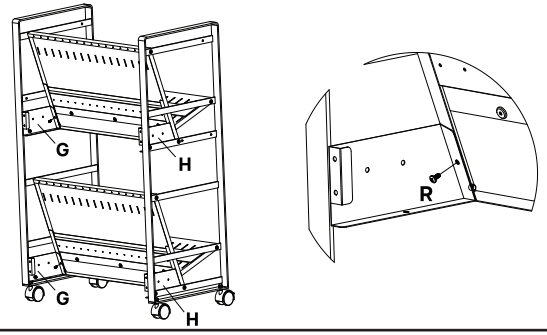

6 Attach the Lower Tray Panels (**I**) behind the Shelf Assemblies using two Large Frame Screws (**Q**) and two Small Frame Screws (**R**) per shelf.

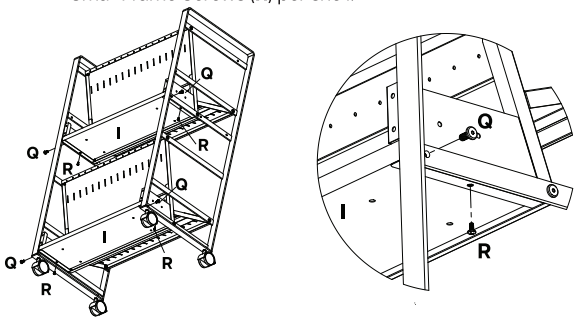

LUXOR™

USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.

2245 N. Delany Road. Waukegan. IL 60087
customerservice@luxorworkspaces.com
(800) 323-4656
IINST-PC-4042

CHMC006 32-Bay USB Type-C® Open Charging Cart Assembly Instructions (Ctd.)

ASSEMBLY INSTRUCTIONS:

7 Attach the USB Type-C® Power Strips (**J**) to Lower Tray Panels as shown using four Small Frame Screws (**R**) per shelf.

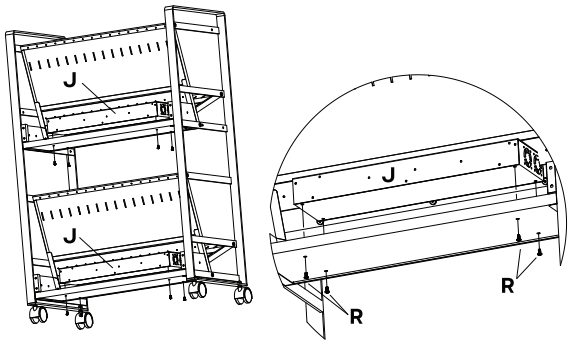

8 Attach the Tray Front Panels (**K**) using four Small Frame Screws (**R**) per shelf.

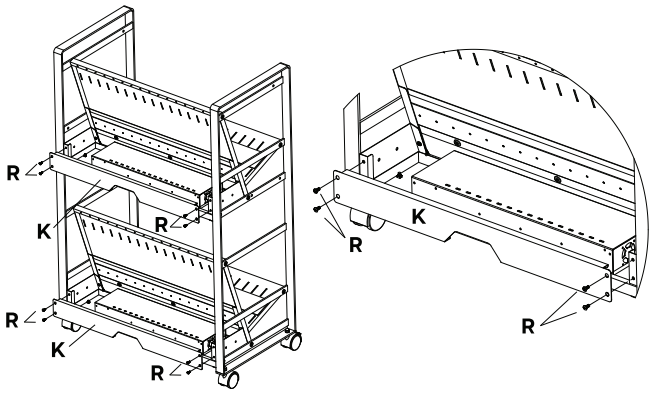

9 Insert 64 Cable Clips (**S**) into the holes on the back of the Rear Shelf Panels (**F**) as shown.

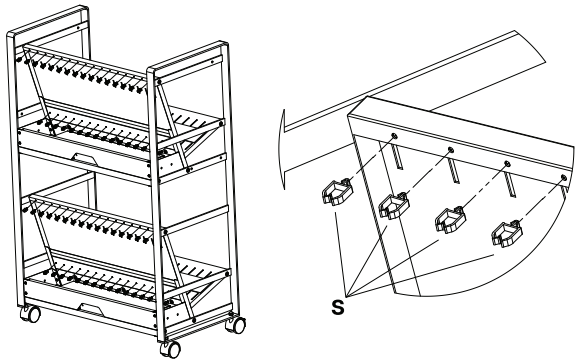

10 Insert a USB Type-C® Charging Cable (**M**) into the far left port on a USB Type-C® Power Strip (**J**). Route the cable through the left set of Cable Clips (**S**). Repeat the process for the remaining 31 USB Type-C® Cables (**M**).

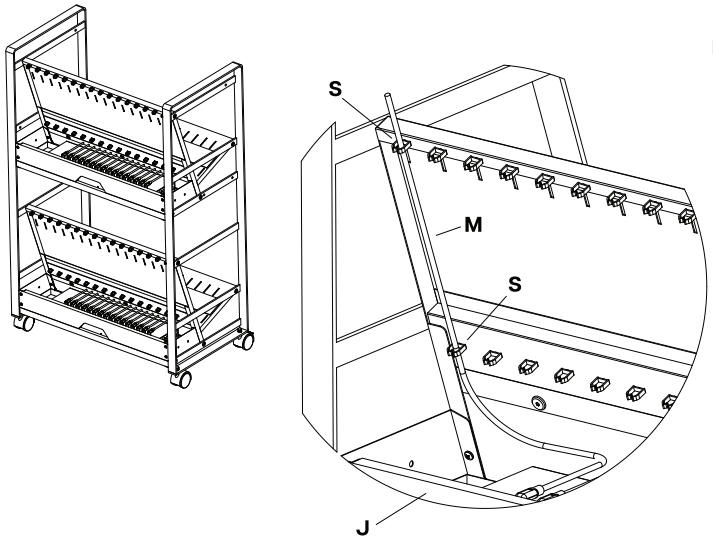

11 Attach the Security Brackets (**N**) as shown using four Small Frame Screws (**R**) per shelf.

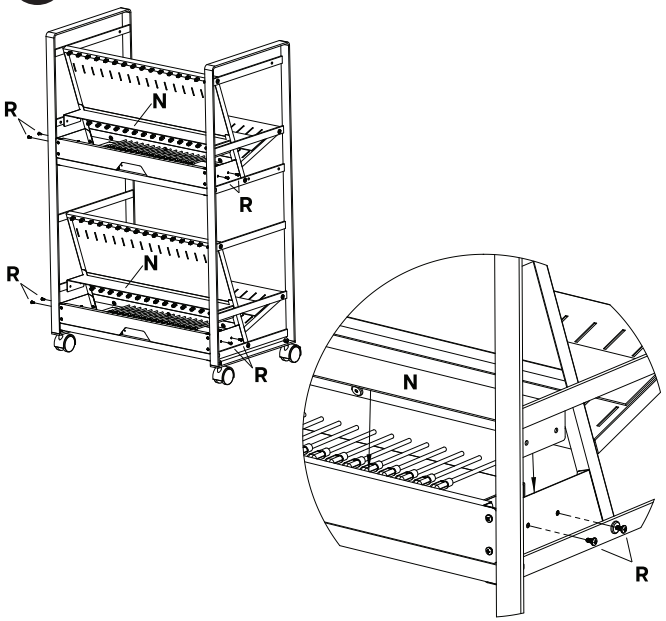

12 Insert 34 Device Dividers (**L**) into the slots on the Shelf Assemblies as shown.

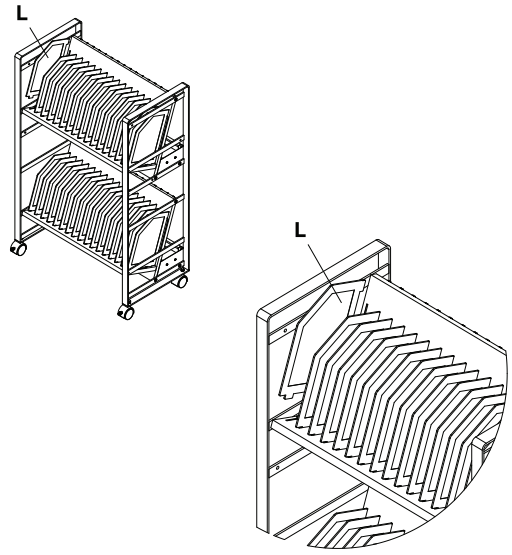

LUXOR

USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.

2245 N. Delany Road. Waukegan. IL 60087
customerservice@luxorworkspaces.com
(800) 323-4656
INST-PC-4042